


SUSSEX RURAL MULTI

PRODUCT INFORMATION

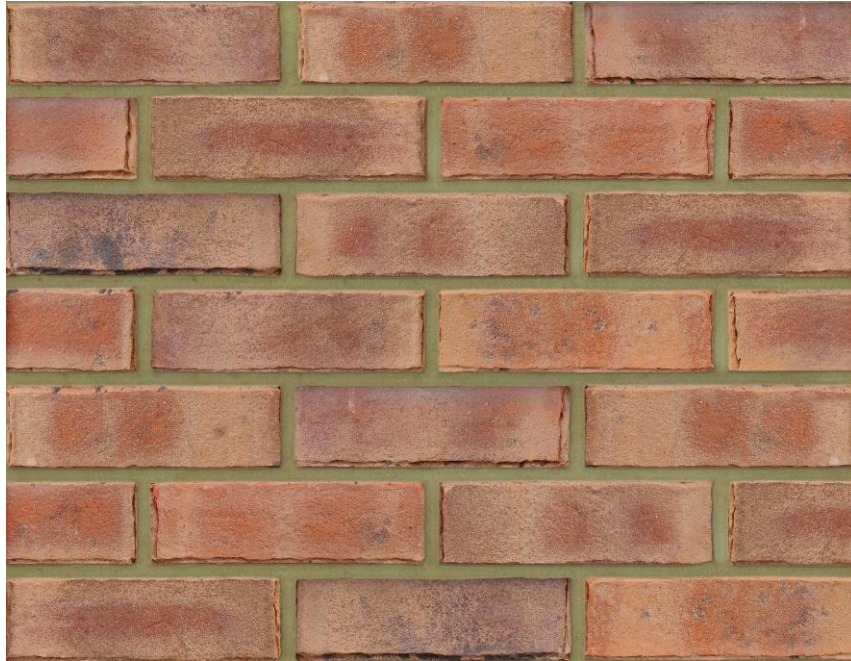

Packaging	Shrink wrapped & Palletised
-----------	-----------------------------

TECHNICAL INFORMATION

Brick Dimensions (L x W x H)	215 x 102 x 65mm
Size Tolerances Mean & Range	T2, R2
Configuration	Perforated
Voids	≤ 37%
Mean Compressive Strength	35 N/mm ²
Active Soluble Salts	S2
Water Absorption	≤ 10%
Durability	F2
Gross Dry Density	1700 Kg/m ³
Equivalent Thermal Conductivity	0,21 W/ mK
Initial Rate of Absorption	0,5 -1,5 Kg/(m ² ·min)

www.brickability.co.uk

0870 143 3332

Queensgate House, Cookham Road, Bracknell, Berkshire RG12 1RB

Issue Date: January 2023